

# 24 kV - 250 A

## Fixings for transformer bushings



### Electrical Ratings

Maximum system voltage (Um): 24kV

Impulse: 125kV

AC withstand (1Min): 54kV

P.D test at 30kV: <10pC

Continuous current: 250A

### Application

For oil-insulated (R-temp, hydrocarbon, or silicon), apparatus, including switchgear, transformer, and capacitors.

System voltage (Um) of 24 kV.

Continuous Current 250 A.

For indoor and outdoor installations.

Mounting in vertical or horizontal position.

### Standards

Meets the interface requirements of CENELEC HD506 S1, ANSI/IEEE 386, DIN 47636

Has been tested with mating parts to IEC 60502-4 and CENELEC HD 629.1 S1

### Quality Assurance


Our manufacturing facility is registered to ISO 9001-2000 by third party audit.

Required production test.

100% factory tested.

### PACKAGING

Supplied in a kit with all necessary parts.

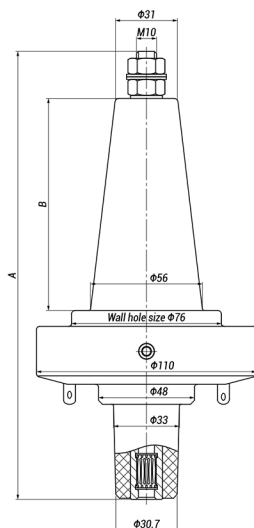

### Specifications

Product Code	Voltage Ur (kV)	Current Ir (A)	Dimensions (mm)	
			A	B
<b>TGZ-25-250</b>	12-24	250	224	108
<b>TGZ-250C</b>	12-24	250	284	168
<b>TGZ-250S</b>	12-24	250	189	73