


# Outdoor High-voltage Switch Disconnecter

By-pass Switch

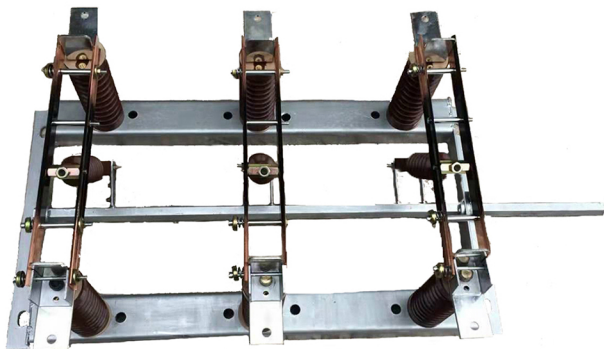

## • Introduction

According IEC standards, Up to 36kV,900A,200kV BIL ,Three phase disconnecter, Porcelain and polymer type insulator. Manual and electric drivers, Accessories and relays.

## • Technical data

No.	Item	Unit	Data		
1	Rated voltage	kV	12	24	36
2	Rated current	A	400/630	400/630	400/630
3	Rated frequency	Hz	50/60	50/60	50/60
4	Rated short-time withstand current	kA	20	20	25
5	Rated short-circuit duration	s	4	4	4
6	Main loop resistance	$\mu\Omega$	$\leq 100$	$\leq 100$	$\leq 100$
7	Lightning impulse withstand voltage	kV	75	125	185
8	Mechanical life	Times	2000	2000	2000