


# Outdoor High-voltage Composite Insulator

FZSW Series Line Post Insulator

## FZSW Series Line Post Insulator

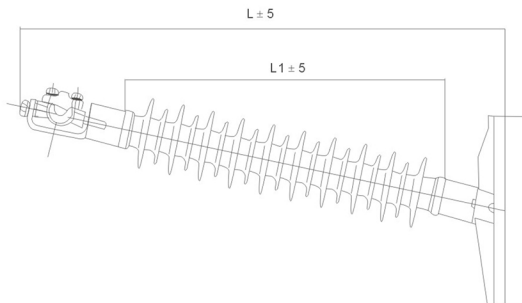

Type	Rated Voltage (kV)	Rated mechanical stretch load (kN)	Structure Height (mm)	Minimum arcing distance (mm)	Minimum nominal creepage distance (mm)	Lightning impulse withstand voltage [peak] > (kV)	Power frequency withstand voltage (wet) > (kV)
FZSW-12	10-15	12.5	380	148	355	75	42
FZSW-24	24-27	8/12	485	300	850	150	65
FZSW-35	35-38	6/8/12	555	369	1050	185	95
FZSW-66	66-72	6/8/12	960	650	1800	410	185
FZSW-115	115	6/8/12	1115	848	2130	620	295
FZSW-132	110-140	6/8/12	1450	1210	3210	760	430