


Outdoor High-voltage Dropout Fuse Cutouts

Silicone Housing Dropout Fuse cutouts

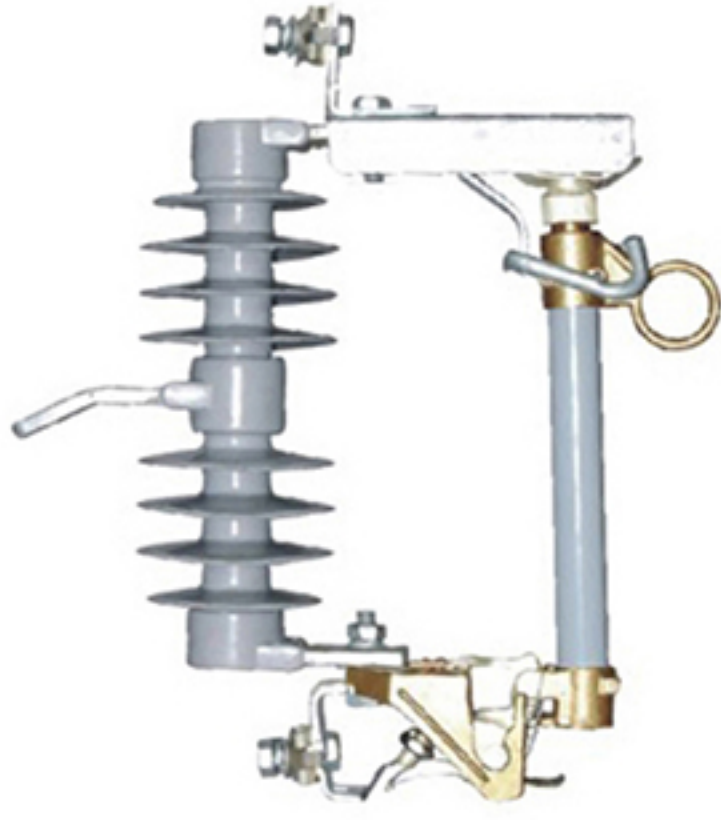

12kV-15kV

Type 型号	Rated Voltage 额定电压 (kV)	Rated Current 额定电流 (A)	Breaking Current 开断电流 (A)	Impulse Voltage 冲击电压 (BIL)	Power-frequency withstand voltage 工频耐压 (kV)	Leakage distance 爬距 (mm)	Weight 重量 (kg)	Dimensions 包装尺寸 寸组 装 (cm)
HRW12	12	100	6300	110	40	250	6	60X36X11.5
HRW12	12	200	12500	110	40	250	6	



24kV-27kV

Type 型号	Rated Voltage 额定电压 (kV)	Rated Current 额定电流 (A)	Breaking Current 开断电流 (A)	Impulse Voltage 冲击电压 (BIL)	Power-frequency withstand voltage 工频耐压 (kV)	Leakage distance 爬距 (mm)	Weight 重量 (kg)	Dimensions 包装尺寸 寸组 装 (cm)
HRW12	24	100	8000	150	65	540	7	50X38X16
HRW12	24	200	12500	150	65	540	7	



15kV-27kV

Type 型号	Rated Voltage 额定电压 (kV)	Rated Current 额定电流 (A)	Breaking Current 开断电流 (A)	Impulse Voltage 冲击电压 (BIL)	Power-frequency withstand voltage 工频耐压 (kV)	Leakage distance 爬距 (mm)	Weight 重量 (kg)	Dimensions 包装尺寸 寸组 装 (cm)
HRW12	27	100	8000	125	45	600	6.5	50X36X12.5
HRW12	27	200	12500	125	45	600	6.5	



35kV-40.5kV

Type 型号	Rated Voltage 额定电压 (kV)	Rated Current 额定电流 (A)	Breaking Current 开断电流 (A)	Impulse Voltage 冲击电压 (BIL)	Power-frequency withstand voltage 工频耐压 (kV)	Leakage distance 爬距 (mm)	Weight 重量 (kg)	Dimensions 包装尺寸 寸组 装 (cm)
HRW12	35	100	6300	170	70	1100	14	71X36X15
HRW12	35	200	8000	170	70	1100	15	



24kV-27kV

Type 型号	Rated Voltage 额定电压 (kV)	Rated Current 额定电流 (A)	Breaking Current 开断电流 (A)	Impulse Voltage 冲击电压 (BIL)	Power-frequency withstand voltage 工频耐压 (kV)	Leakage distance 爬距 (mm)	Weight 重量 (kg)	Dimensions 包装尺寸 寸组 装 (cm)
HRW 27	27	300	25	170	70	720	8.5	73X36X16
HRW 27	27	400	25	170	70	720	9	